
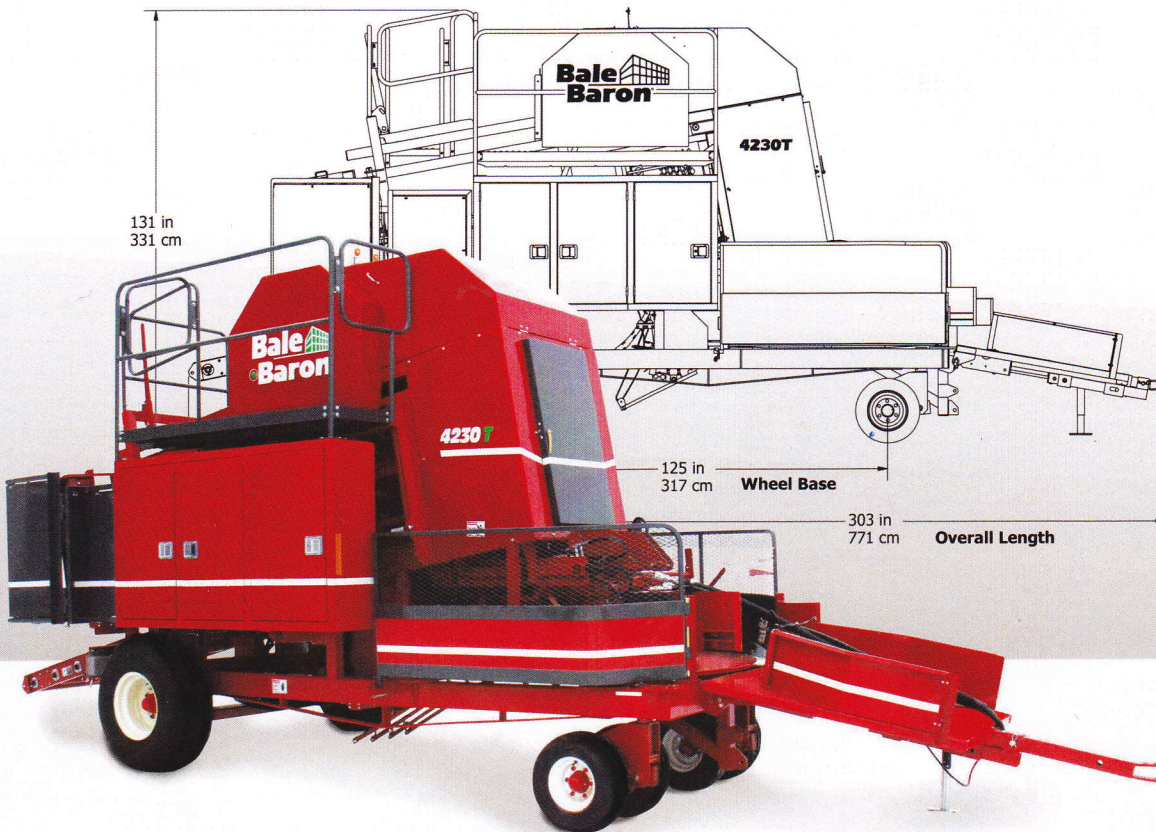


4230T

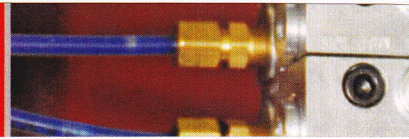

| | |
|---|--|
| MODEL | 4230 T |
| Trails Behind Baler | Yes |
| Pull Type - Behind Tractor | N/A |
| Surge Brakes | Standard |
| Closed Center Hydraulic System | Standard |
| Open Center Hydraulic System | Optional |
| Load Sensing System | Optional |
| Hydraulic Power Unit - For Tractors with Insufficient Hydraulic Capacity | Optional |
| Hydraulic Oil Cooler | Optional - Standard With Power Unit |
| Capability: 14"x18" Bale - 21 Bale Bundle 16"x18" Bale - 18 Bale Bundle | Standard |
| Capacity | 400/hr. at 20 GPM or 75 LPM 600/hr. at 25 GPM or 95 LPM 800/hr. at 30 GPM or 113 LPM |
| Horsepower Requirement | 95hp minimum |
| Hydraulic Flow Requirement | 20 GPM Min. 25 GPM plus recommended |
| Remote SCV Required | 1 set |
| Shipping Weight | 10,100 LBS. or 4580 KG. |
| Shipping Weight with Power Unit | 11,200 LBS. or 5080 KG. |

4230T

The trail behind Bale Baron tows directly behind the baler. As bales exit the baler they are packed by the Bale Baron. The unit is powered by remote hydraulics on the tractor or by optional diesel power unit.

